


Type F Flanged Pressure Gauge

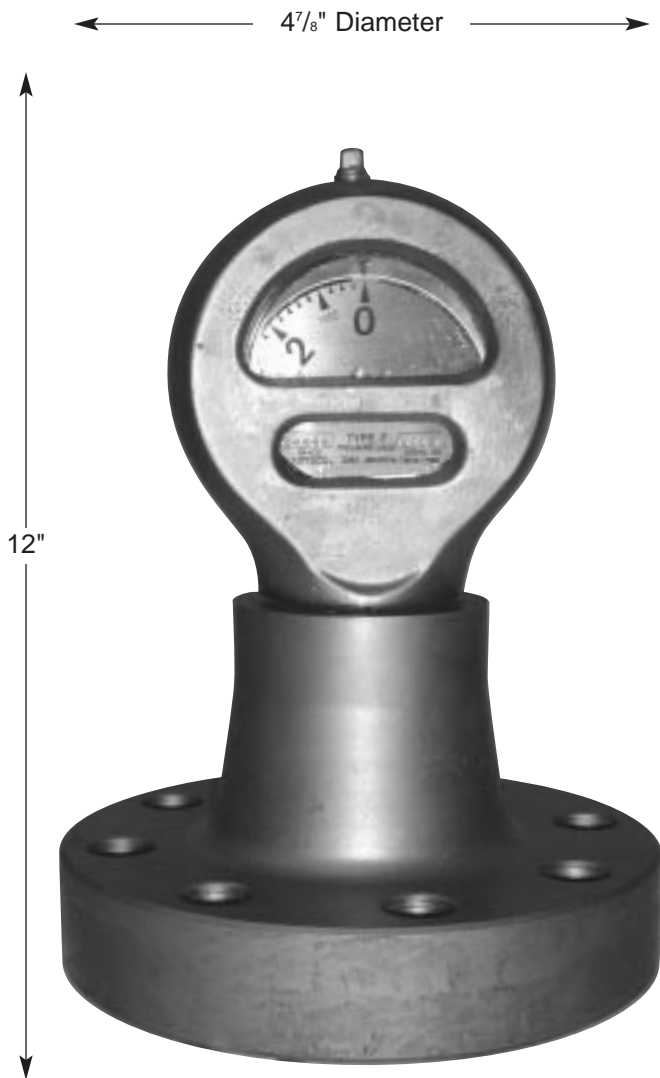

- Even with reciprocating pumps, gauge provides quick, accurate response to pressure changes and minimizes fluctuations with a built-in dampening mechanism
- Temperature range: -50°F to 180°F
Liquid surrounding gauge mechanism minimizes wear from vibration and mechanical shock
- Heavy duty seals create watertight barrier around gauge mechanism
- Impact resistant, clear polymer lens

To order, specify:

- ① Unit of measure and pressure range
 - ② Type of service
 - ③ Flange size (1¹³/₁₆ API 6BX or 2¹/₁₆ API 6BX)
- ✓ RETSCO part number

Pressure Range	Standard Service	Corrosive Fluid Service
10,000 psi	661541	661561
15,000 psi	661641	661661
20,000 psi	661741	661761
70,000 kPa	662541	662561
104,000 kPa	662641	662661
140,000 kPa	662741	662761
700 Bar	663541	663561
1,040 Bar	663641	663661
1,400 Bar	663741	663761

* Maximum height measurement 12" (varies with pressure range and flange size).

Also available in kg/cm²

Shipping Weights: 1¹³/₁₆ API 6BX 29 lbs (13.2 kg)

GAUGE REBUILDING SERVICE

RETSCO, INC. can rebuild damaged or worn gauges to "like new" condition. Contact your RETSCO distributor or sales representatives for more information.